


# cinox<sup>®</sup> therminox<sup>®</sup>

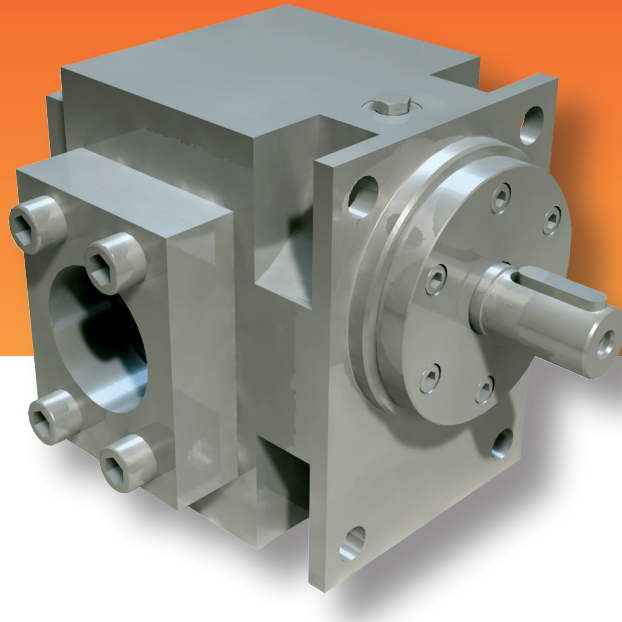

## A range of typical pumping media:

- Organic and inorganic chemicals
- Solvents
- Acids and alkalis
- Emulsions
- Sludges and condensates
- Prepolymers, oligomers and monomers
- Additives
- Resins
- Cellulose derivatives and pulps
- Silicones
- Waxes and paraffins
- Cosmetic products
- Pharmaceutical products
- Foodstuffs
- Foodstuff extracts and flavourings
- Animal feeds
- Vegetable and animal oils and fats

## Highest resistance

Acids, alkalis, solvents and other aggressive substances in all conceivable forms are part of everyday life in the chemical processing industry. Precisely the environment in which Maag Pump Systems' tried and established gear pumps develop their full potential. cinox<sup>®</sup>/therminox<sup>®</sup> gear pumps are corrosion resistant and heatable **stainless steel conveying units** that satisfy the stringent quality requirements of the chemical processing industry.

Thanks to the extensive range of components and the materials they are made from, Maag gear pumps can be configured to suit customers' specific requirements and are therefore far superior to standard pumps in terms of performance and reliability. Whether the applications involve highly pure, corrosive, viscous or very hot media, Maag Pump Systems holds the solution to meet every pumping challenge.

- Wide viscosity range
- Wide temperature range
- Wide pressure range
- High efficiencies due to tolerances being modified in line with applications
- Reliability
- Longevity
- Safety

**Technical specifications:**

- Housing:**
- Stainless steel
  - Hastelloy
- Gear shafts:**
- Stainless steel
  - Ferralium
  - Hastelloy
  - Ceramic
- Bearing\*:**
- Synthatic carbon
  - Stainless steel with carbon bushes
  - Hardened tool steel
  - Ceramic
  - NiAg
  - Bronze – CuAl
- Shaft seal:**
- Single or double mechanical seal
  - External mechanical seal
  - Interlock or heater connections available
  - Seal ring from a range of materials
  - Magnetic coupling with single or double containment shell
- Connections:** SAE, CETOP, DIN and ANSI flanges

\* Other materials and designs available  
 \*\* Higher flow rates upon request

**Application limits:**

- Viscosity:** 0.3 to 4,000,000 cP / mPas
- Temperature:** -20 to 600 °F / -30 to 320 °C
- Suction pressure:** Vacuum to 925 PSI / 65 bar
- Discharge pressure:** Vacuum to 2,900 PSI / 200 bar
- Flow rate\*\*:** 0.025 to 630 GPM / 0.1 to 2400 l/min

**Accessories:**

- Stands, motor flanges and base plates
- Product connecting flanges
- Couplings
- Motors and geared motors
- Frequency converters
- Shaft seal systems

**Options:**

- Electrical heating
- Heated seals
- Bi-directional rotation
- Special reworks for demanding applications

**Certificates:**

- ATEX certificate
- 3.1 certificate
- German Air Quality certificate (TA-Luft)
- Performance test certificates

**Theoretical conveying capacities:**

Pump size	Theoretical conveying capacities in GPM / l/min at 0 bar Δp				
	at 500 rpm	at 750 rpm	at 1000 rpm	at 1500 rpm	at 3000 rpm
22/6	0.17 / 0.64	0.25 / 0.96	0.34 / 1.28	0.51 / 1.92	1.01 / 3.84
22/13	0.37 / 1.39	0.55 / 2.09	0.73 / 2.78	1.10 / 4.17	2.20 / 8.34
22/22	0.62 / 2.35	0.93 / 3.53	1.24 / 4.70	1.86 / 7.05	3.72 / 14.10
28/28	1.35 / 5.10	2.02 / 7.65	2.69 / 10.20	4.04 / 15.30	8.08 / 30.60
36/36	3.38 / 12.80	5.07 / 19.20	6.76 / 25.60	10.14 / 38.40	20.29 / 76.80
45/45	6.12 / 23.15	9.17 / 34.73	12.23 / 46.30	18.35 / 69.45	36.72 / 139.00
56/56	12.23 / 46.30	18.35 / 69.45	24.46 / 92.60	36.69 / 138.90	
70/70	23.35 / 88.00	34.87 / 132.00	46.49 / 176.00	69.74 / 264.00	
90/90	49.14 / 186.00	73.44 / 278.00	98.01 / 371.00	147.14 / 557.00	
110/110	94.57 / 358.00	141.86 / 537.00	189.15 / 716.00		
140/140	177.26 / 671.00	266.02 / 1007.00	354.52 / 1342.00		
180/180	424.26 / 1606.00	636.13 / 2408.00			

The operating limits are dependant upon the service conditions. Please contact Maag Pump Systems for specific applications.

**Switzerland**  
 Maag Pump Systems Textron AG  
 Aspstraße 12  
 8154 Oberglatt  
 Schweiz  
 Phone +41 44 278 82 00  
 Fax +41 44 278 82 01  
 welcome@maag.textron.com  
 www.maag.com

**USA**  
 Maag Pump Systems Textron, Inc.  
 1500 Continental Boulevard  
 Charlotte, NC 28273  
 USA  
 Phone +1 704 716 9000  
 Fax +1 704 716 9001  
 MaagAmericas@maag.textron.com  
 www.maag.com

**Germany**  
 Maag Pump Systems Textron GmbH  
 Ludwig-Erhard-Straße 10  
 34131 Kassel  
 Deutschland  
 Phone +49 561 31001 0  
 Fax +49 561 31001 20  
 MaagGermany@maag.textron.com  
 www.maag.com

**Italy**  
 Maag Pump Systems Textron Italia S.r.l.  
 Viale Romagna 7  
 20089 Rozzano (MI)  
 Italia  
 Phone +39 02 575 932 1  
 Fax +39 02 575 932 32  
 MaagItaly@maag.textron.com  
 www.maag.com

**Singapore**  
 Maag Singapore  
 25 International Business Park  
 04-73 German Center  
 Singapore 609916  
 Phone +65 65628720  
 Fax +65 65628729 Fax  
 MaagSingapore@maag.textron.com  
 www.maag.com

**France**  
 Maag Pump Systems Textron SARL  
 111, Rue du 1er Mars 1943  
 69100 Villeurbanne  
 France  
 Phone +33 4 72 68 67 30  
 Fax +33 4 72 68 67 31  
 MaagFrance@maag.textron.com  
 www.maag.com

**China**  
 Maag Pump Systems Textron Shanghai  
 Room 601 Lippo Plaza  
 No. 222 Huai Hai Zhong Road  
 200021 Shanghai, China  
 Phone +86 21 5396 6555  
 Fax +86 21 5396 6913  
 MaagChina@maag.textron.com  
 www.maag.com